



VOLTAGE TRANSDUCER UMT 516/MT 516

- True RMS **AC voltage measurements**.
- **Voltage auto range measurements** up to 600 V_{rms}.
- **Wide frequency measurement** range 16 Hz - 400 Hz.
- High **accuracy class 0.2** (IEC-688), **0.1** on communication.
- **Serial or Ethernet and USB** communication.
- Up to **two I/O modules** (analogue out, alarm out, digital out, digital in).
- Powerful **analogue out**; 6 voltage and current ranges, non-linear characteristics, etc.
- **User friendly** PC setting **software**.

FEATURES

- Measurements of true RMS voltage, frequency THD U and MD.
- High accuracy class 0.2 (IEC-688).
- Frequency range from 16 Hz to 400 Hz.
- 16 adjustable alarms.
- RS232/RS485 communication up to 115,200 bit/s or USB communication and Ethernet simultaneously.
- MODBUS communication protocol.
- Up to 2 inputs or outputs (analogue outputs, digital inputs, alarm outputs, digital outputs).
- Universal power supply (two voltage ranges).
- Automatic range of nominal voltage (max. 600 V_{L-N}).
- Housing for DIN rail mounting.
- User-friendly PC MiQen software.

DESCRIPTION

(U)MT 516 is intended for measuring and monitoring single-phase electrical power network. Voltage input is electrically isolated from the system by means of high resistive input chain. It measures true RMS voltage value by means of fast sampling of voltage signals, which makes instruments suitable for acquisition of transient events. A built-in microcontroller calculates measurands (voltage, frequency, THD U, MD) from the measured signals. Measurands can be then converted into load independent DC current or voltage which is proportional to the true RMS measured value for the purpose of regulation of analogue and/or digital devices.

COMPLIANCE WITH STANDARDS

Standard EN	Description
61010-1: 2001	Safety requirements for electrical equipment for measurement, control and laboratory use
60688:1995 / A2: 2001	Electrical measuring transducers for converting AC electrical variables into analogue and digital signals
61326-1:2006	EMC requirements for electrical equipment for measurement, control and laboratory use - Part 1: General requirements
60529:1997/A1:2000	Degrees of protection provided by enclosures (IP code)
60 068-2-1/ -2/ -6/ -27/-30	Environmental testing (-1 Cold, -2 Dry heat, -30 Damp heat, -6 Vibration, -27 Shock)
UL 94	Tests for flammability of plastic materials for parts in devices and appliances

APPLICATION

The (U)MT 516 voltage transducer is used for a permanent monitoring of a single-phase voltage and frequency values. Wide range of various I/O modules makes (U)MT 516 a perfect choice for numerous applications. (U)MT 516 is delivered configured to default values. Subsequent customer configuration is possible with user friendly setting software MiQen.. (U)MT 516 supports a wide range of communication interfaces. Standard serial RS232/485 with speed up to 115200 baud is perfect for simple applications and serial bus interfacing. Ethernet 10/100 is ideal for a long distance monitoring and configuration of numerous transducers. USB 2.0 can be used for a fast set-up or memory acquisition.

TECHNICAL DATA

Measurement input:

- Nominal frequency range 50 Hz, 60 Hz
- Measuring frequency range: 16 Hz–400 Hz (max. 1000 Hz)

Voltage measurements:

- Nominal value (UN) 57.7 V_{LN}...500 V_{LN}
- Max. measured value (cont.) 600 V_{LN}
- Max. allowed value 2 × U_N ; 10 s (acc. to IEC/EN 60 688)
- Consumption < U² / 4.2 M Ω per phase
- Input impedance 4.2 M Ω per phase

System:

Voltage inputs can be connected either directly to low-voltage network or via a high-voltage transformer to high-voltage network.

BASIC ACCURACY UNDER REFERENCE CONDITIONS

Total accuracy (measurements and analogue output) according to IEC/EN 60 688.

Accuracy is presented as percentage of reading of the measurand except when it is stated as an absolute value.

Measurand	Accuracy (±% of reading)	
Voltage Rms	0.2	0.1(1)
Frequency (f)	10 mHz	
THD(U) (0...400 %)	0.5	

⁽¹⁾ On communication

COMMUNICATION

(U)MT 516 has a wide variety of communication possibilities to suit specific demands. It is equipped with two standard communication ports (COM1A and COM1B). This allows different users to access data from a device simultaneously and by using ethernet communication, data can be accessed worldwide.

Different configurations are possible (to be specified with order).

Configuration	COM1A	COM1B
1	RS232/485 ⁽¹⁾	/
2	Ethernet	USB

⁽¹⁾ RS485 communication is available through DB9 or screw-in terminals, while RS232 is available only through DB9

Serial communication:	RS232 ⁽¹⁾	RS485 ⁽¹⁾
Connection type	Direct	Network
Connection terminals	DB9 ⁽¹⁾	Screw terminals ⁽¹⁾
Function	Settings, measurements and records acquisition, firmware upgrade	
Insulation	Protection class I, 3.3 kV _{ACRMS} 1 min	
Max. connection length	3 m	1000 m
Transfer mode	Asynchronous	
Protocol	MODBUS RTU	
Transfer rate	2.4 kBaud to 115.2 kBaud	
Number of bus stations	/	≤ 32

⁽¹⁾ Both types of comm. are available but only one at a time

Ethernet:	
Connection type	Network
Connection terminals	RJ-45
Function	Settings, measurements and records acquisition, firmware upgrade
Insulation	Protection class I, 3.3 kV _{ACRMS} 1 min
Transfer mode	Asynchronous
Protocol	MODBUS TCP
Transfer rate	10/100 Mb/s autodetect

USB:	
Connection type	Direct
Connection terminals	USB-B
Function	Settings, measurements and records acquisition, firmware upgrade
Insulation	Protection class I, 3.3 kV _{ACRMS} 1 min
Transfer mode	Asynchronous
Protocol	MODBUS RTU
Transfer rate	USB 2.0

INPUT/OUTPUT MODULES

(U)MT 516 is equipped with four multipurpose input/output slots. The following modules are available:

Alarm (digital) output	2 outputs	any I/O
Analogue output	2 outputs	any I/O
Digital input	2 inputs	any I/O
Watchdog (status) output	2 outputs	any I/O

Analogue output:

Each of up to two analogue outputs is fully programmable and can be set to any of 6 hardware ranges, 4 current and 2 voltage, without opening an instrument. They all use the same output terminals.

Programmable DC current output:

Output range values -100...0...100 %

-1...0...1 mA	Range 1
-5...0...5 mA	Range 2
-10...0...10 mA	Range 3
-20...0...20 mA	Range 4
other ranges possible	by MiQen software

Burden voltage	10 V
External resistance	$R_{Bmax} = 10 \text{ V}/I_{outN}$

Programmable DC voltage output:

Output range values -100...0...100%

-1...0...1 V	Range 5
-10...0...10 V	Range 6
other ranges possible	by software

Burden current	5 mA
External resistance	$R_{Bmin} = U_{outN} / 5 \text{ mA}$

General:

Linearization	Linear, Quadratic
No. of break points	5
Output value limits	$\pm 120\%$ of nominal output
Response time	< 100 ms
(measurement and analogue output)	
Residual ripple	< 0.5 % p.p.

The outputs 1 and 2 may be either short or open-circuited. They are electrically insulated from each other (500 VACrms) and from all other circuits (3320 VACrms).

All output range values can be altered subsequently (zoom scale) using the setting software, but a supplementary error results (see INTRINSIC ERROR).

Alarm (digital) output:

Type	Relay switch
Rated voltage	48 V AC/DC (+40% max)
Max. switching current	200 mA
Contact resistance	$\leq 100 \text{ m}\Omega$ (100 mA, 24 V)
Impulse	Max. 4000 imp/hour Min. length 100 ms
Insulation voltage	
Between coil and contact	4000 VDC
Between contacts	1000 VDC

Digital input

Rated voltage	48 V AC/DC (+ 40% max)
Max. current	< 1.5 mA
Min. signal width	20 ms
Min. pause width	40 ms
SET voltage	40 %...120 % of rated voltage
RESET voltage	0 %...10 % of rated voltage

Watchdog (status) output

Type	Relay switch
Normal operation	Relay in ON position
Failure detection delay	$\approx 1.5 \text{ s}$
Rated voltage	48 V AC/DC (+40 % max)
Max. switching current	1000 mA
Contact resistance	$\leq 100 \text{ m}\Omega$ (100 mA, 24 V)

UNIVERSAL POWER SUPPLY

Standard (high):

Nominal voltage AC	80 V...276 V
Nominal frequency	40 Hz...65 Hz
Nominal voltage DC	70 V...300 V
Consumption	< 5 VA
Power-on transient current	< 20 A; 1 ms

Optional (low):

Nominal voltage AC	48 V...77 V
Nominal frequency	40 Hz...65 Hz
Nominal voltage DC	19 V...70 V
Consumption	< 5 VA
Power-on transient current	< 20 A; 1 ms

SAFETY:

<p>Protection:</p> <p> </p>	<p>protection class I (protective earth terminal due to touchable metal parts (USB-B, RJ-45, DB9), current limiting fuse 1 A on aux. supply)</p> <p>Voltage inputs via high impedance Double insulation for I/O ports and COM1 port</p>
<p>Pollution degree</p>	<p>2</p>
<p>Installation category</p>	<p>CAT III; 600 V_⊥ meas. inputs</p> <p>CAT III; 300 V_⊥ aux. supply</p> <p>Acc. to EN 61010-1</p>
<p>Test voltages</p>	<p>U_{AUX↔I/O, COM1}: 2210 VAC_{rms}</p> <p>U_{AUX↔U} inputs: 3320 VAC_{rms}</p> <p>U inputs↔I/O, COM1: 3320 VAC_{rms}</p> <p>U inputs↔I inputs: 3320 VAC_{rms}</p>
<p>Enclosure material</p>	<p>PC/ABS</p> <p>Acc. to UL 94 V-0</p>
<p>Enclosure protection</p>	<p>IP 40 (IP 20 for terminals)</p>

MECHANICAL

<p>Dimensions</p>	<p>(100 × 127 × 75) mm</p>
<p>Mounting</p>	<p>Rail mounting (35 × 15) mm acc. to DIN EN 50 022</p>
<p>Enclosure material</p>	<p>PC/ABS, PC (sliding cover)</p>
<p>Flammability</p>	<p>Acc. to UL 94 V-0</p>
<p>Weight</p>	<p>375 g</p>

AMBIENT CONDITIONS:

<p>Ambient temperature</p>	<p>usage group II 0...15...30...45 °C Acc. to IEC/EN 60 688</p>
<p>Operating temperature</p>	<p>-30 °C to +70 °C (2x rated class)</p>
<p>Storage temperature</p>	<p>-40 °C to +70 °C</p>
<p>Average annual humidity</p>	<p>≤ 93% r.h.</p>

REFERENCE CONDITIONS:

<p>Ambient temperature</p>	<p>15°C...30°C</p>
<p>Relative humidity</p>	<p>≤ 93% r.h.</p>
<p>Voltage input</p>	<p>57.7 V...500 V</p>
<p>Current input</p>	<p>0.31 A...5 A</p>
<p>Frequency</p>	<p>45 Hz...65 Hz</p>
<p>Active/Reactive power factor</p>	<p>cosφ = 1, sinφ = 1</p>
<p>Waveform</p>	<p>Sinus</p>

INTRINSIC-ERROR (FOR ANALOGUE OUTPUTS):

For intrinsic-error for analogue outputs with bent or linear-zoom characteristic multiply accuracy class with correction factor (c). Correction factor c (the highest value applies):

Linear characteristic


$$c = \frac{1 - \frac{y_0}{y_e}}{1 - \frac{x_0}{x_e}} \quad \text{or} \quad c = 1$$

Bent characteristic

$$x_{b-1} \leq x \leq x_b$$

b – number of break point (1 to 5)

$$c = \frac{y_b - y_{b-1}}{x_b - x_{b-1}} \cdot \frac{x_e}{y_e} \quad \text{or} \quad c = 1$$

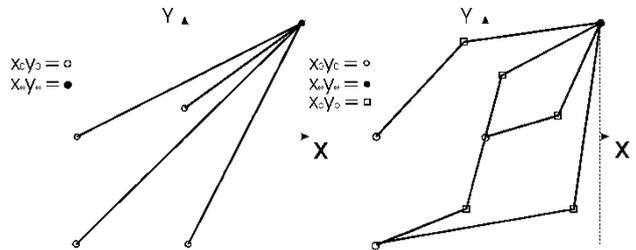

Limit of the output range


Examples of settings with linear and bent characteristic.

ALARMS

(U)MT560/550 supports recording and storing of 32 alarms in four groups. A time constant of maximal values in a thermal mode, a delay time and switch-off hysteresis are defined for each group of alarms.

MIQEN - SETTING AND ACQUISITION SOFTWARE


MiQen software is intended for supervision of (U)MT 516 and many other instruments on a PC. Network and the transducer setting, display of measured and stored values and analysis of stored data in the transducer are possible via the serial, Ethernet or USB communication. The information and stored measurements can be exported in standard Windows formats. Multilingual software functions on Windows 98, 2000, NT, XP operating systems.

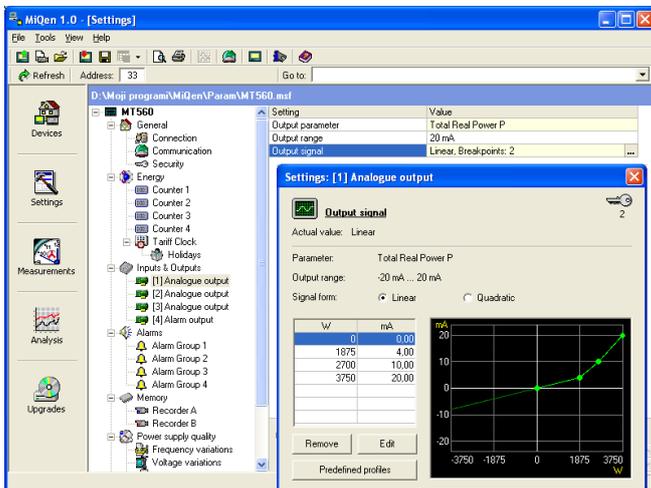

MiQen software is intended for:


- Setting all of the instruments parameters (online and offline).
- Viewing current measured readings.
- Complete I/O modules configuration.
- Upgrading instruments firmware.
- Searching the net for devices.
- Virtual interactive instrument.
- Comprehensive help support.

CONNECTION

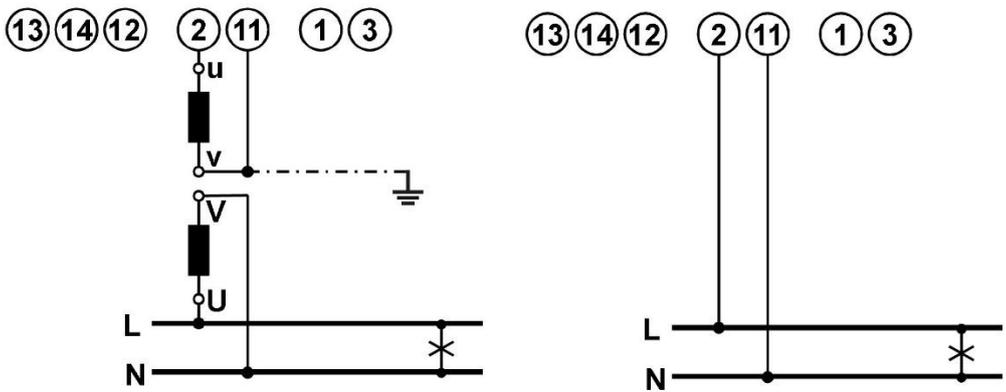
System/ connection	Terminal assignment
Single-phase connection 1b (1W)	

DIMENSIONAL DRAWING

Dimensions for MT 516 (standard EU clamp style terminals):

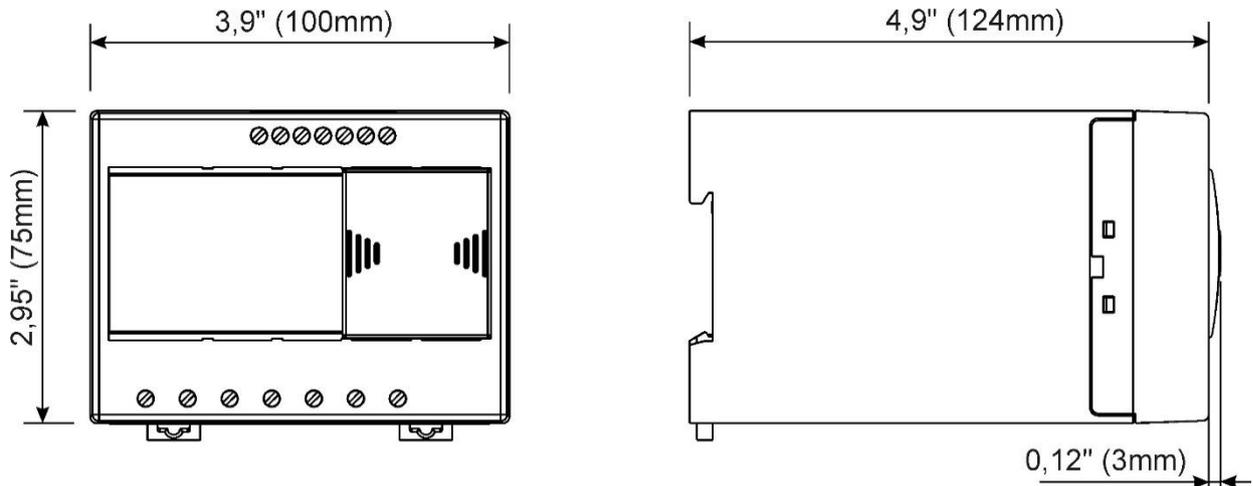

Dimensions for UMT 516 (ring type terminal block):

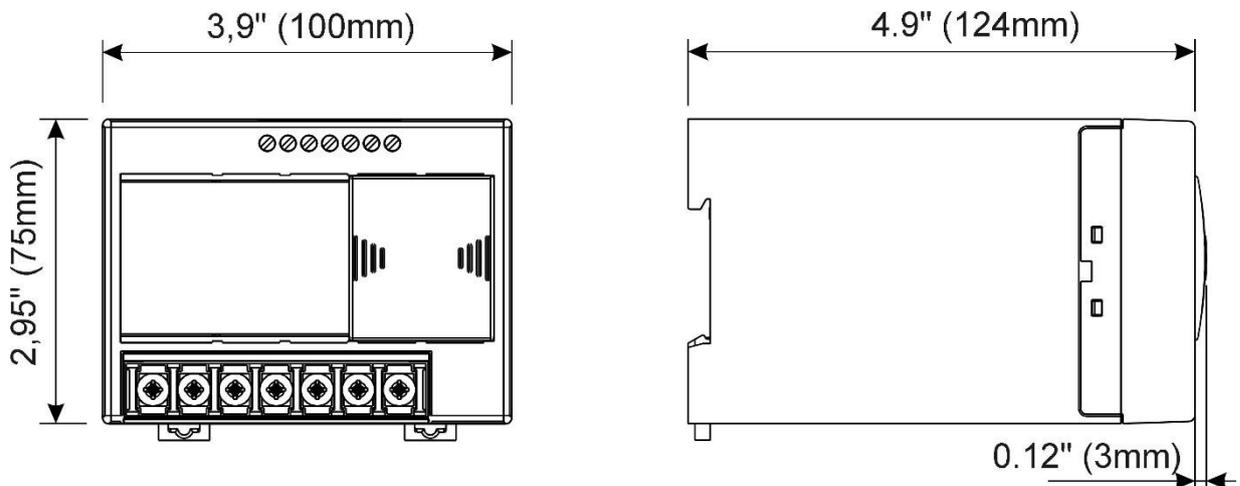

CONNECTION TABLE

Function		Connection	
Measuring input:	AC voltage	UL1	1/3
		N	2
		I/O	11
Inputs / outputs:	Module 1	⊕ +	15
		⊖ -	16
	Module 2	⊕ +	17
		⊖ -	18
Auxiliary power supply:		+ / AC (L)	13
		- / AC (N)	14
		GROUND	12
Communication:	RS485	Rx / A	23**
		NC	24**
		Tx / B	25**

*If ETHERNET/USB communication is supported, terminals 23, 24, and 25 are not used (unconnected)

RS232 communication is available only on DB9 connection terminal under transparent cover

DATA FOR ORDERING

(U)MT 516:

The following data shall be stated:

- Type of a transducer
- Type of power supply
- Type of communication
- Type of I/O module(s)
- Required energy accuracy

Supplement:

MiQen software

ORDERING

When ordering (U)MT 516, all required specifications should be stated in compliance with the ordering code. Additional information could be stated regarding functionality of analogue outputs. Default settings for analogue outputs provided that no ordering information is given will be:

Analogue output	Input quantity	Output quantity
AO1	U1 (0...500)V	0...20 mA
AO2	f (45...65)Hz	0...20 mA

If different analogue output settings are required, a proper input quantity/output quantity pair for each analogue output should be provided.

The transducers automatic range of input voltage (500 V_{L-N}) is not stated in the code.

Example of ordering:

MT 516 with EU style clamp terminals and with a universal-HI supply is connected to a universal high voltage and 5 A secondary current on 50 Hz network. Ethernet & USB communication, digital input as I/O1 and relay output as I/O2.

Voltage and current nominal value are due to auto-range fixed to max. nominal value and are therefore omitted from ordering code.

Example ordering code:

```

MT 516  S  H  E  F  M
           |  |  |  |  |
           |  |  |  |  Relay (alarm) output
           |  |  |  Digital input 48 VAC/DC
           |  |  Ethernet & USB
           |  70 VDC.. 300 VDC, 80 VAC... 276 VAC
           50 Hz, 60 Hz
    
```

GENERAL ORDERING CODE

All specifications are obligatory except function of analogue output(s), which should be stated in a form of description.

Device Type	Nominal freq.	Aux. power supply	Comm. COM1	I/O module 1	I/O module 2
(U)MT	X	X	X	X	X
				A	Analogue output*
				S	Pulse output
				M	Relay (alarm) output
				W	Watchdog output
				F	Digital input 48 V _{AC/DC}
				N	Without
			R	RS232 & 485 DB9 + Terminal *	
			E	Ethernet & USB	
		H	70...300 V _{DC} , 80...276 V _{AC} *		
		L	19...70 V _{DC} , 48...77 V _{AC}		
	S	50, 60 Hz *			
	A	400 Hz			
MT 516	EU style clamp terminals				
UMT 516	ring style terminal block				

* - standard

DISPOSAL




It is forbidden to deposit electrical and electronic equipment as municipal waste.

The manufacturer or provider shall take waste equipment free of charge.

DICTIONARY:

<i>RMS</i>	<i>Root Mean Square</i>
<i>PO</i>	<i>Pulse output</i>
<i>TI</i>	<i>Tariff input</i>
<i>PA</i>	<i>Power angle (between current and voltage)</i>
<i>PF</i>	<i>Power factor</i>
<i>THD</i>	<i>Total harmonic distortion</i>
<i>Ethernet</i>	<i>IEEE 802.3 data layer protocol</i>
<i>MODBUS/DNP3</i>	<i>Industrial protocol for data transmission</i>
<i>MiQen</i>	<i>ISKRA setting and acquisition Software</i>
<i>AC</i>	<i>Alternating quantity</i>
<i>IR</i>	<i>Infrared (optical) communication</i>

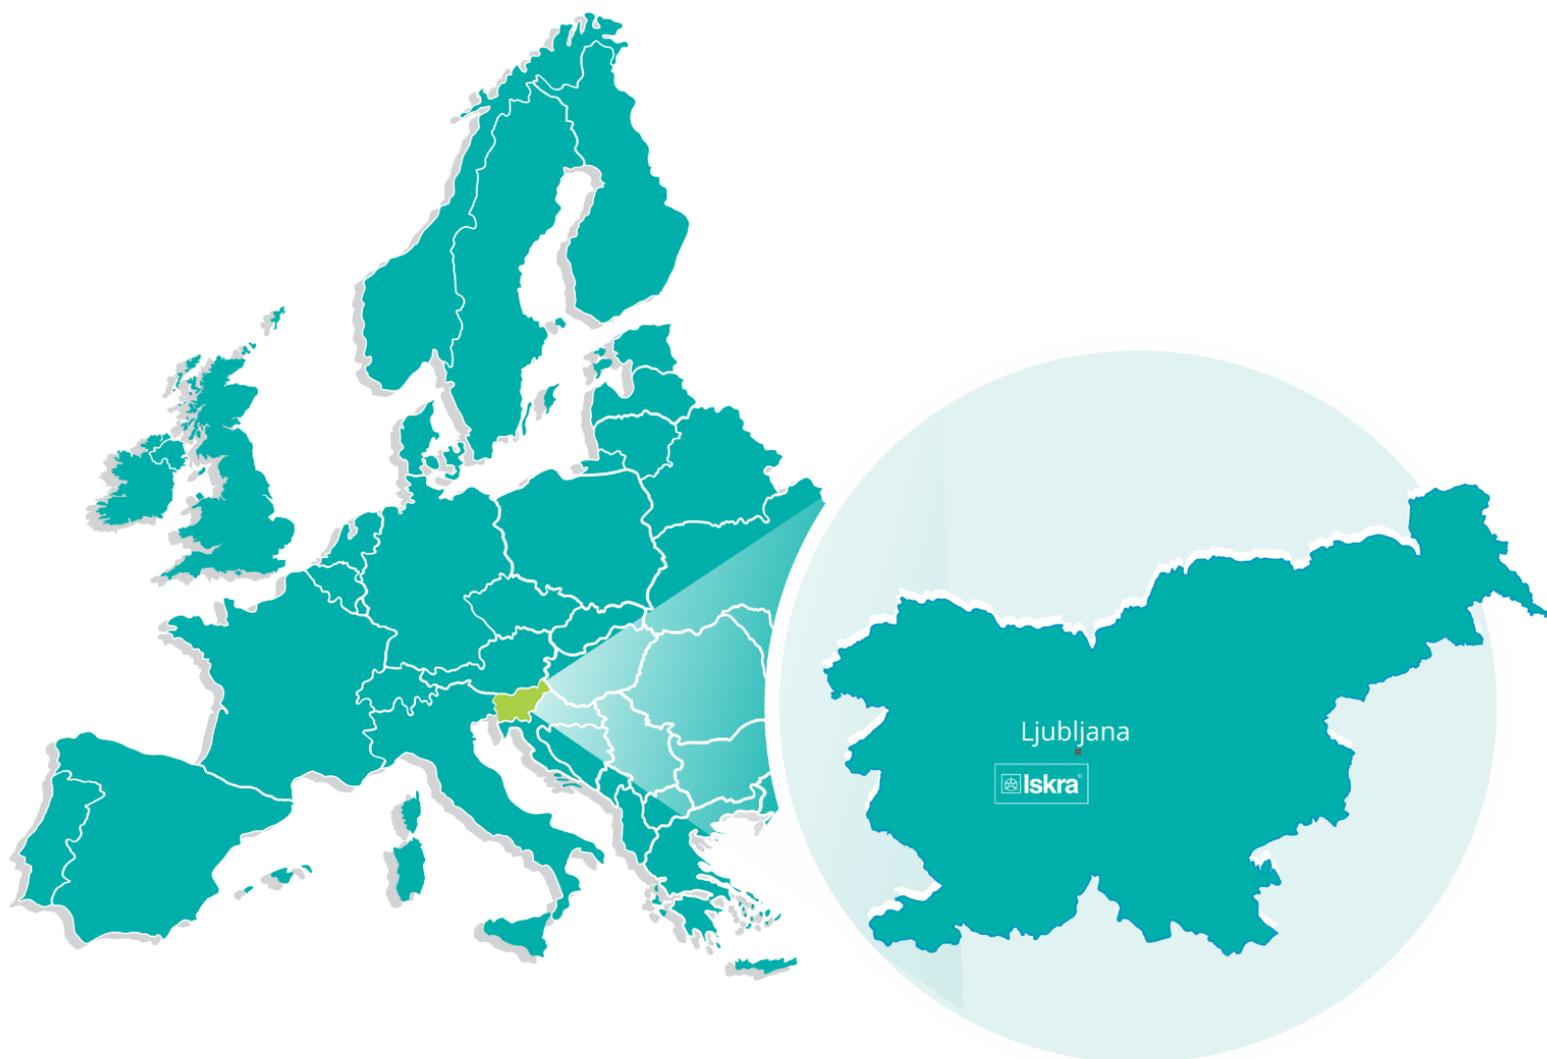

PE Ljubljana

Stegne 21
SI-1000, Ljubljana
Phone: +386 1 513 10 00

PE Kondenzatorji

Vajdova ulica 71
SI-8333, Semič
Phone: +386 7 38 49 200

PE MIS

Ljubljanska c. 24a
SI-4000, Kranj
Phone: +386 4 237 21 12

PE Baterije in potenciometri

Šentvid pri Stični 108
SI-1296, Šentvid pri Stični
Phone: +386 1 780 08 00

PE Galvanotehnika

Glinek 5
SI-1291, Škofljica
Phone: +386 1 366 80 50

Iskra IP, d.o.o.

Metliška cesta 8
SI-8333, Semič
Phone: +386 7 384 94 54

Iskra Lotrič, d.o.o.

Otoče 5a
SI-4244, Podnart
Phone: +386 4 535 91 68

Iskra ODM, d.o.o.

Otoče 5a
4244, Podnart
Phone: +386 4 237 21 96

Iskra STIK, d.o.o.

Ljubljanska cesta 24a
SI-4000, Kranj
Phone: +386 4 237 22 33

Iskra Tela L, d.o.o.

Omladinska 66
78250, Laktaši
Phone: +387 51 535 890

Iskra Sistemi - M dooel

Ul, Dame Gruev br. 16/5 kat
1000, Skopje
Phone: +389 75 444 498

Iskra Commerce, d.o.o.

Hadži Nikole Živkoviča br. 2
11000, Beograd
Phone: +381 11 328 10 41

Iskra Hong Kong Ltd.

33 Canton Road, T.S.T.
1705, China HK City
Phone: +852 273 00 917
+852 273 01 020



Iskra, d.o.o.

Stegne 21
SI-1000 Ljubljana, Slovenia

Phone: +386 (0) 1 513 10 00
www.iskra.eu